
Overview



- 1. External 3.5" Bay
- 2. External 5.25" Bay
- 3. Power button
- 4. Standard Front I/O: 4 USB 2.0, headphone, microphone
- 5. Tower stand (optional)

Form Factor

Small Form Factor

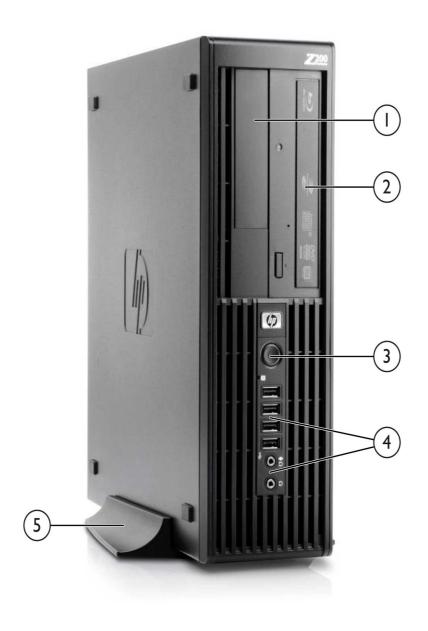

Overview

Operating Systems

Genuine Windows® 7 Ultimate 64-bit

Genuine Windows® 7 Professional 32-Bit

Genuine Windows® 7 Professional 64-Bit

NOTES: Systems may require upgraded and/or separately purchased hardware and/or DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See http://www.microsoft.com/windows/windows-7/ for details.

HP Linux Installer Kit for Linux

fincludes drivers for 32-bit & 64-bit OS versions of

Red Hat Enterprise Linux (RHEL) 5 Workstation,

Red Hat Enterprise Linux (RHEL) 6 Workstation,

64-bit Novell SUSE Linux Enterprise Desktop (SLED) 11]

See http://www.hp.com/workstations/software/linux for details.

Novell SLED 11 Linux Preloaded

Red Hat Enterprise Linux WS5 (Paper Licence drop-in-the-box only)

For detailed OS/hardware support information for Linux, see:

http://www.hp.com/support/linux hardware matrix

Available Processors

Intel® Pentium® processor G6950, 2.80 GHz, 73W, 3 MB cache, 1066 MHz memory, Dual-Core Intel Core processor i3-540, 3.06 GHz, 73W, 4 MB cache, 1333 MHz memory, Dual-Core, HT Intel Core processor i3-550, 3.20 GHz, 73W, 4 MB cache, 1333 MHz memory, Dual-Core, HT Intel Core processor i3-560, 3.33 GHz, 73W, 4 MB cache, 1333 MHz memory, Dual-Core, HT Intel Core processor i5-650, 3.20 GHz, 73W, 4 MB cache, 1333 MHz memory, Dual-Core, HT, Turbo Intel Core processor i5-660, 3.33 GHz, 4 MB cache, 1333 MHz memory, Dual-Core, HT, Turbo Intel Core processor i5-670, 3.46 GHz, 73W, 4 MB cache, 1333 MHz memory, Dual-Core, HT, Turbo Intel Core processor i5-680, 3.60 GHz, 73W, 4 MB cache, 1333 MHz memory, Dual-Core, HT, Turbo Intel Core processor i5-760, 2.80 GHz, 95W, 8 MB cache, 1333 MHz memory, Quad-Core, Turbo Intel Core processor i7-870, 2.93 GHz, 95W, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel Core processor i7-880, 3.06 GHz, 95W, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel® Xeon® processor X3430, 2.40 GHz, 95W, 8 MB cache, 1333 MHz memory, Quad-Core, Turbo Intel Xeon processor X3440, 2.53 GHz, 95W, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel Xeon processor X3450, 2.66 GHz, 95W, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel Xeon processor X3470, 2.93 GHz, 95W, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel Xeon processor X3480, 3.06 GHz, 95W, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo

Available Processor Disclaimers

Integrated Intel HD graphics is not supported on the Quad-Core Intel Core i5-700 Desktop Processor Series, Intel Core i7-800 Desktop Processor Series or Intel Xeon Processor 3400 Series.

Intel's numbering is not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: http://www.intel.com/products/processor_number/ for details.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers and applications enabled for Intel 64 architecture. Processor will not operate (including 32-bit operation) without an Intel 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: http://www.intel.com/info/em64t for more information.

Dual-Core and Quad-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.

Color

Jack Black

Overview

Convertibility	The Z200 SFF can either be p tower stand.	laced flat on the desktop or made to stand on the desk with the optional
Expansion Slots (see system board section for more details)	1 PCI Express Gen1 slc1 PCI Express Gen2 slc	ot x1 mechanical/x1 electrical (Low Profile) ot x16 mechanical/ x16 electrical (Low Profile, dedicated for graphics) ot x16 mechanical/x4 electrical (Low Profile)
Expansion Bays (see storage section for more details)	1 internal 3.5" bay, and1 external 5.25" bay.	d 1 shared with external 3.5" bay.
Front I/O	1394 card), 1 audio out, and	4: 1 Front, 1 Rear (rear via optional card, front port via 22-in-1 MCR with 1 microphone/ 2nd headphone.
Internal I/O	4 USB 2.0 ports available by	two separate 9-pin headers
Rear I/O	2.0, 1 standard and 1 option	out from Intel HD graphics (available on dual-core processors only); 6 USB al serial port, 1 optional parallel port, 2 PS/2, RJ-45 (NIC), 1 audio line in, can be retasked to function as line in, line out, microphone, or headphone
Interfaces Supported	22-in-1 Media Card Reader (optional)
Chassis Dimensions (W x D x H)		100mm x 338mm x 381mm (HxWxD) (3.95" x13.3" x15.0"); on (excluding stand dimension): 338mm x 100mm x 381mm (HxWxD) (13.3
Weight	Exact weights depend upon consystem Weight* 7.6 kg (16.72) Shipping Weight* 8.1 kg (17.14) Max Supported Weight (deskth*Configured with 1 hard driver card.	2 lbs) 86 lbs)
Temperature	Operating:	40° to 95°F (5° to 35°C)
·	Non-operating	-40° to 140°F (-40° to 60°C)
Humidity	Operating: Non-operating	8% to 85% 8% to 90%
Maximum Altitude (non-	Operating:	10,000 feet; 3,000 m
pressurized)	Non-operating	30,000 feet; 9,100 m
Power Supply	240 watts wide-ranging, activ The Power Supply Efficiency R http://www.80plus.org/manu 240W_Report.pdf; http://www.80plus.org/manu 2402E0_ECOS%201586_24	e Power Factor Correction, 89% Efficient eport for this product may be found at these links: /psu/psu_reports/HEWLETT%20PACKARD_PC80190_ECOS%201587_ /psu/psu_reports/HEWLETT%20PACKARD_HP- 0W_Report.pdf; /psu/psu_reports/HEWLETT%20PACKARD_PS-4241-
Backup Devices	For a complete listing of com	patible DAT tape drives, LTO tape drives and RDX Removable Disk Backup



Supported Components

Processors		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	Dual-Core Intel® "Clarkdale" Processors for Z200				
	Intel® Pentium® Processor G6950 2.8 GHz, 3MB cache, 1066 MHz memory, Dual-Core	Υ	Ν		
	Intel Core Processor i3-540 3.06 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT	Υ	Ν		
	Intel Core Processor i3-550 3.20 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT	Υ	Ν		
	Intel Core Processor i3-560 3.33 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT	Υ	Ν		
	Intel Core Processor i5-650 3.20 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo	Υ	Ν		
	Intel Core Processor i5-660 3.33 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo	Υ	Ν		
	Intel Core Processor i5-670 3.46 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo	Υ	Ν		
	Intel Core Processor i5-680 3.60 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo	Υ	Ν		
	Quad-Core Intel® Core™ i5-700 and Core i7-800 Desk	top Processor	Series		
	Intel Core Processor i5-760 2.80 GHz, 8 MB cache, 1333 MHz memory, Quad-Core, Turbo	Υ	Ν		
	Intel Core Processor i7-870 2.93 GHz, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo	Υ	Ν		
	Intel Core Processor i7-880 3.06 GHz, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo	Υ	Ν		
	Quad-Core Intel® Xeon® Processor 3400 Series with Inte	el® Nehalem	Architectu	ıre	
	Intel Xeon Processor X3430 2.40 GHz, 8MB cache, 1333 MHz memory, Quad-Core, Turbo	Υ	Ν		
	Intel Xeon Processor X3440 2.53 GHz, 8MB cache, 1333 MHz memory, Quad-Core, HT, Turbo	Υ	Ν		
	Intel Xeon Processor X3450 2.66 GHz, 8MB cache, 1333 MHz memory, Quad-Core, HT, Turbo	Υ	Ν		
	Intel Xeon Processor X3470 2.93 GHz, 8MB cache, 1333 MHz memory, Quad-Core, HT, Turbo	Υ	Ν		
	Intel Xeon Processor X3480 3.06 GHz, 8MB cache, 1333 MHz memory, Quad-Core, HT, Turbo	Υ	Ν		

Integrated Intel® HD graphics is supported only on Dual-Core Intel® "Clarkdale" Processors; it is not supported on the Quad-Core Intel Core i5-700 Desktop Processor Series, Intel Core i7-800 Desktop Processor Series or Intel Xeon Processor 3400 Series



Supported Components

Hard Drives
SATA Hard Drives

SATA Hard Drives		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	SATA (Serial ATA) Hard Drives for HP Workstations				
	160GB SATA 7200 rpm 3Gb/s 3.5" HDD	Υ	Υ	PV944A	
	250GB SATA 7200 rpm 3Gb/s 3.5" HDD (for HP Z-Workstations)	Y	Y	PY278AA	
	320GB SATA 7200 rpm 3Gb/s 3.5" HDD	Υ	Υ	FH963AA	
	500GB SATA 7200 rpm 3Gb/s 3.5" HDD	Υ	Υ	PV943A	
	1000GB (1TB) SATA 7200 rpm 3.0Gb/s 3.5" HDD	Υ	Υ	GE262AA	
	160GB SATA 10K rpm SFF in 3.5" Frame HDD	Υ	Υ	EW222AA	
	300GB SATA 10K rpm SFF in 3.5" Frame HDD	Υ	Υ	FM802AA	
SATA Solid State Drives	HP Solid State Drives for Workstations				
	HP 160GB SATA X25-M SSD	Υ	Y	WV915AA	

Hard Drive Controllers		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	Integrated SATA 3.0 Gb/s Controller				
	Integrated SATA 3.0 Gb/s Controller	Υ	Ν		
	Factory integrated RAID on motherboard for S	SATA drives			
	RAID 0 Configuration – Striped Array	Y	Ν		Available May 2010
	RAID 1 Configuration – Mirrored Array	Υ	Ν		

RAID 0 availability May 2010.

SATA hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.

All drives must be identical in type and capacity

All RAID arrays must be less than 2 TB

NOTE 1: Requires identical hard drives (speeds, capacity, interface).



Supported Components

\sim	- 1	•
Gra	nh	ICS.

Integrated Graphics		Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported Multi Mixed
	Integrated Intel HD Graphics Media Acco	elerator (Z200))			
	Intel® HD Graphics (integrated)	Υ	Υ			1
	Professional 2D					
	NVIDIA Quadro NVS 295 256MB PCIe Graphics Card	Y	Υ	FY943AA		2
	NVIDIA NVS 300 512MB PCle Graphics Card	Y	Υ	XP612AA		2
	Entry 3D					
	NVIDIA Quadro FX 380 LP 512MB PCle Graphics Card	Y	Υ	WL055AA		1
	ATI FirePro V3800 512MB PCle Graphics Card	Y	Υ	WL048AA		1
	NVIDIA Quadro 600 1GB Graphics Card	Υ	Υ	WS093AA		1

Memory CTO **Option Kit Part** Support Notes Number

PC3-10600 DDR3-1333 ECC Unbuffered DIMMs CTO

2GB (2x1GB) DDR3-1333 ECC Unbuffered RAM 1-CPU 3GB (3x1GB) DDR3-1333 ECC Unbuffered RAM 1-CPU 4GB (2x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU 8GB (4x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU 8GB (2x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU 16GB (4x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

PC3-10600 DDR3-1333 nECC Unbuffered DIMMs CTO

1 GB (1x1GB) DDR3-1333 nECC Unbuffered RAM 1-CPU 2 GB (2x1GB) DDR3-1333 nECC Unbuffered RAM 1-CPU

4 GB (2x2GB) DDR3-1333 nECC Unbuffered RAM 1-CPU

8 GB (4x2GB) DDR3-1333 nECC Unbuffered RAM 1-CPU

Sub-Section Description/Notes

Two channels of DDR3 memory are supported. To realize full performance at least one DIMM must be inserted into each channel.

The CPUs determine the speed at which the memory is clocked. If a 1066 MHz capable CPU is used in the system, the maximum speed the memory will run at is 1066 MHz regardless of the specified speed of the memory.

AMO

PC3-10600 DDR3-1333 nECC Unbuffered DIMMs AMO

HP 1GB DDR3-1333 non-ECC UDIMM XC497AA HP 2GB DDR3-1333 non-ECC UDIMM XC440AA



Supported Components

1GB (1x1GB) DDR3-1333 ECC Unbuffered RAMFX698AA2GB (1x2GB) DDR3-1333 ECC Unbuffered RAMFX699AA4GB (1x4GB) DDR3-1333 ECC Unbuffered RAMNL797AA

NOTE: Only unbuffered DDR3 DIMMs are supported.

Multimedia and Audio Devices		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	HP Thin USB Powered Speakers	Υ	Υ	KK912AA	
	Integrated Intel/Realtek HD ALC261 Audio	Υ	Υ		

Optical and Removable Storage		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	HP 16X DVD-ROM SATA Drive	Υ	Υ	EW268AA	See note 1
	HP 16X DVD+/-RW SuperMulti SATA Drive	Υ	Υ	EW269AA	
	HP 22-in-1 Media Card Reader Kit (Workstations)	Υ	Υ	NK361AA	
	HP Blu-ray Writer	Υ	Υ	AR482AA	
	HP 22-in-1 3.5 JackBlack Media Card Reader with 1394a	Υ	Υ		

Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players. As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

NOTE 1: Not supported as a 2nd drive option.

Controller Cards		Factory Configured	•	Option Kit Part Number	
	HP FireWire/IEEE 1394a PCI Card	Υ	Υ		



Supported Components

Monitors		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	HP LP2065 20-inch LCD Monitor	Υ	Υ	EF227A4	
	HP LP2475w 24-inch Widescreen LCD Monitor	Υ	Υ	KD911A4	
	HP DreamColor LP2480zx Professional Display	Υ	Υ	GV546A4	
	HP LP3065 30-inch Widescreen LCD Monitor	Υ	Υ	EZ320A4	
	HP ZR22w 21.5-inch S-IPS LCD Monitor	Υ	Υ	VM626A4	
	HP ZR24w 24-inch S-IPS LCD Monitor	Υ	Υ	VM633A4	
	HP ZR30w 30-inch S-IPS LCD Monitor	Υ	Υ	VM617A4	
	Supported by all Operating Systems available from HP				

Networking and Communications		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC	Ν	Y		This is a PCI Express card based on the Broadcom 5761 chip.
	Intel Gigabit CT Desktop NIC	Υ	Υ		
	Integrated Intel 82578DM PCIe LoM Controller	Υ	Ν		

Screen Size Diagonally Measured

NOTE 1: "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

The Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC and the Intel Gigabit CT NIC are supported on the following operating systems:

Microsoft Windows XP Pro 32-bit and 64-bit and Microsoft Windows 7 32-bit and 64-bit versions. Red Hat Enterprise Linux(RHEL), 5 Desktop/Workstation Novell SLED 10 & 11

Racking and Physical Security		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	Security Cable with Kensington Lock	Ν	Υ	PC766A	
	HP Solenoid Hood Lock & Hood Sensor	Υ	Υ	GJ116AA	SFF
					version



Supported Components

Input Devices		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	HP USB Standard Keyboard	Υ	Υ	DT528A	
	HP PS/2 Standard Keyboard	Υ	Υ	DT527A	
	HP USB Smart Card Keyboard	Ν	Υ	ED707AA	
	HP USB CCID SmartCard Keyboard	Υ	Υ	BV813AA	
	HP 2.4GHz Wireless Keyboard & Mouse	Ν	Υ	NB896AA	
	HP USB Laser Mouse	Υ	Υ	GW405AA	
	HP USB 2-Button Optical Scroll Mouse	Υ	Υ	DC172B	
	HP PS/2 Optical Scroll Mouse	Υ	Υ	EY703AA	
	HP USB Optical 3-Button Mouse	Υ	Υ	DY651A	
	HP SpaceExplorer 3D USB Controller	Ν	Υ	RY429AA	

Other Hardware		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP	Power Cord Kit	Ν	Υ	DM293A	
HP	Workstation Mouse Pad	Y	Ν		Japan only
HP	Serial Port Adapter	Ν	Υ	PA716A	
HP	ENERGY STAR 5.0 Enabled Configuration	Υ	Ν		
HP	Parallel Port Adapter Kit	Ν	Υ	KD061AA	

Software		Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	HP Performance Advisor	Y	N		Supports Windows 7 only. Available as a web download or standard preload with the Windows 7 preinstall.
	Roxio Easy Media Creator (DVD/Blu-ray Disc burner software)	Υ	Ν		
	Intervideo WinDVD (DVD player/burner software)	Υ	Ν		
	HP ProtectTools Security	Y	N		Must select as a Configure to Order option. Delivered as a "drop in the box" CD.

Supported Components

PDF Complete - Trial Edition	Υ	Ν
HP Client Manager Software v6.2 (optional download)	Υ	Ν
MS Office Home & Business 2010	Υ	Ν
HP Support Assistant	Υ	Ν

Operating Systems Support Notes

Genuine Windows® 7 Ultimate 64-

bit

Genuine Windows® 7 Professional

32-bit

Genuine Windows® 7 Professional

64-bit

HP Linux Installer Kit

Red Hat Enterprise Linux (RHEL) Workstation - Paper License (1yr)

Novell SLED 11 Linux

See: http://www.microsoft.com/windows/windows-7/ for support

details.

See: $http://www.microsoft.com/windows/windows-7/\ for\ support$

details.

See: http://www.hp.com/workstations/software/linux

Preload



System Technical Specifications

System Board	
System Board Form Factor	BTX 21.2mm x 26.7mm
Processor Socket	Single LGA 1156
CPU Bus Speed	DMI
Chipset	Intel® PCH 3450
Super I/O Controller	SMSC SCH5327, Rev B
Memory Expansion Slots	4 DDR3 memory slots
Memory Type Supported	DDR3, UDIMM (Unbuffered), ECC & nECC
Memory Modes	Channel non-Interleaved
Memory Speed Supported	1333MHz DDR3
Memory Protection	ECC available on data, parity on address and command
Memory	
Maximum Memory	16GB

MEMORY LOADING CONFIGURATIONS

Memory Size (GB)	DIMM1	DIMM2	DIMM3	DIMM4
1	1 GB			100
2	1 GB		1 GB	
3	1 GB	1 GB	1 GB	100
4	2 GB		2 GB	
8	2 GB	2 GB	2 GB	2 GB
8	4 GB	1	4 GB	
16	4 GB	4 GB	4 GB	4 GB

Memory Configuration (Supported)	ECC DIMMs are supported, as well as non-ECC 1GBx1 configuration on Z200 SFF.		
PCI Express Connectors	1 PCI Express x16 Gen2 slot (x16 electrical/ mechanical) 1 PCI Express Gen1 slot x16 mechanical/x4 electrical 1 PCI Express Gen1 slot x1 mechanical/x1 electrical NOTES: Note: In the PCIe x16 Gen 2 slot, if it is not being used for a graphics card, only cards certified as After Market Options for this platform are supported.		
PCI Connectors (5.0V)	1 PCI		
Supported Drive Interfaces	SATA Integrated (4) Serial ATA interfaces (Three common SATA ports and one that can optionally be used for eSATA). RAID 0 and 1 supported. (Factory integrated RAID is Microsoft Windows only).		
Serial Attached SCSI	None		
Integrated RAID	NOTE: Requires identical hard drives (speeds, capacity, interface)		
Integrated Graphics	ntegrated Intel HD Graphics Media Accelerator		



relevant processors only. NOTES: Unified Memory Architecture (UMA)- A region of system memory is reserved and dedicated to the graphics display. DirectX 9.0 compliant 2D/3D graphics core 1 VGA + 1 DP graphics ports integrated in motherboard. Network Controller Integrated Gbit LAN MAC by Intel PHY Hanksville 82578DM. Management capabilities WOL, PXE 2. and AMT 6.0 Edemal SATA (eSATA) I port eSATA capable with optional eSATA After-Market Option cable kit. IDE connector No Network Controller Management capabilities WOL, PXE 2.1 and ASF 2.0 Serial I rear port 2nd Serial Practilel I internal header (optional parallel port adaptor required) HD Integrated Audio High Definition Integrated Realtek ALC261 Audio with Line in, Line Out, Microphone, Headphone CD-ROM input/Audio No IEEE 1394 Connector(s) Front I IEEE 1394a (requires optional PCI card to function) Rear No Internal No Internal No Front 1 USB 2.0 Rear 6 USB 2.0 Internal 4 USB 2.0 Front Chasis Fan Header No Total Heade	system rechnical spe	cilications				
the graphics display. DirectX 9.0 compliant 2D/3D graphics core 1 VGÅ + 1 DP graphics ports integrated in motherboard. Network Controller Integrated Sat (as Integra			MA (graphics frame buffer). Integrated graphics can support dual display across DP & VGA outputs for levant processors only.			
and AMT 6.0 External SATA (eSATA) 1 port eSATA capable with optional eSATA After-Market Option cable kit. IDE connector No No Network Controller Management capabilities WOL, PXE 2.1 and ASF 2.0 Serial 1 rear port Parallel 1 internal header (optional parallel port adaptor required) HD Integrated Audio High Definition Integrated Realtek ALC261 Audio with Line in, Line Out, Microphone, Headphone CD-ROM input/Audio No IEEE 1394 Connector(s) Front 1 IEEE 1394a (requires optional PCI card to function) Rear No Internal No USB Connector(s) Front 4 USB 2.0 Rear 6 USB 2.0 Internal 4 USB 2.0 Flash ROM Yes CPU Fan Header Not applicable - passive CPU heatsink Chossis Fan Header No Front PCI Fan Header Yes Front Control Yes Front Yes Front Yes Front PCI Fan Header Yes Front PCI		the graphics display. DirectX 9.0 complia	ne graphics display. DirectX 9.0 compliant 2D/3D graphics core 1 VGA + 1 DP graphics ports			
IDE connector	Network Controller		anksville 82578DM. Management capabilities WOL, PXE 2.1			
Floppy connector No Network Controller Management capabilities WOL, PXE 2.1 and ASF 2.0 Serial 1 rear port 2nd Serial Yes- requires optional Serial Port Adaptor Parallel 1 internal header (optional parallel port adaptor required) HID Integrated Audio CD-ROM input/Audio AUX INPUT; Audio IEEE 1394 Connector(s) Front Rear Internal No USB Connector(s) Front 1 IEEE 1394a (requires optional PCI card to function) Rear No Internal No USB Connector(s) Front 4 USB 2.0 Rear 6 USB 2.0 Internal 1 No Front Peader Not applicable - passive CPU heatsink Chassis Fon Header No Front PCI Fan Header No Pront PCI Fan Header No Pront PCI Fan Header Yes Front Control Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED A Hard Drive LED Header Clear Password Jumper Yes Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Cperating Voltage Range 100-240 VAC Rated Voltage Range 100-240 VAC	External SATA (eSATA)	1 port eSATA capable with optional eSAT	A After-Market Option cable kit.			
Network Controller Serial 1 rear port 2nd Serial 2nd Serial 2nd Serial 3 rear port 2nd Serial 3 rear port 2nd Serial 4 rear port 2nd Serial 5 rear port 2nd Serial 7 rear port 2nd Serial 7 resequires optional Serial Port Adaptor Parallel 1 internal header (optional parallel port adaptor required) High Definition Integrated Realtek ALC261 Audio with Line in, Line Out, Microphone, Headphone CD-ROM input/Audio AUX INPUT; Audio No IEEE 1394 Connector(s) Front 1 IEEE 1394a (requires optional PCI card to function) Rear No Internal No USB Connector(s) Front 4 USB 2.0 Rear 6 USB 2.0 Internal 4 USB 2.0 Flosh ROM 7es CPU Fan Header Not applicable - passive CPU heatsink Chassis Fan Header No Front PCI Fan Header Yes Front Control Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Switch, Power LED Yes Power Switch, Power LED 8 Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 100-240 VAC	IDE connector	No				
Serial 1 rear port 2nd Serial Yes- requires optional Serial Port Adaptor Parallel 1 internal header (optional parallel port adaptor required) High Definition Integrated Realtek ALC261 Audio with Line in, Line Out, Microphone, Headphone CD-ROM input/Audio No AUX INPUT; Audio No IEEE 1394 Connector(s) Front 1 IEEE 1394a (requires optional PCI card to function) Rear No Internal No Internal No Rear 6 USB 2.0 Internal 4 USB 2.0 Front A USB 2.0 Flash ROM Yes CPU Fan Header Not applicable - passive CPU heatsink Chassis Fan Header Yes Front Control Ranel Yes Front Control Rence No Front PCI Fan Header Yes Front Control Rence No Front PCI Fan Header Yes Front Control Panel/Speaker Header CMOS Battery Holder-Lithium Integrated Trusted Platform Module Power Supply Headers Clear Password Jumper Yes Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 100-240 VAC	Floppy connector	No				
Paralle Yes- requires optional Serial Port Adaptor	Network Controller	Management capabilities WOL, PXE 2.1	and ASF 2.0			
Parallel 1 internal header (optional parallel port adaptor required) HD Integrated Audio High Definition Integrated Realtek ALC261 Audio with Line in, Line Out, Microphone, Headphone CD-ROM input/Audio No AUX INPUT; Audio No IEEE 1394 Connector(s) Front 1 IEEE 1394a (requires optional PCI card to function) Rear No Internal No USB Connector(s) Front 4 USB 2.0 Rear 6 USB 2.0 Internal 4 USB 2.0 Front 4 USB 2.0 Front 4 USB 2.0 Front 9 CPU Fan Header Not applicable - passive CPU heatsink Chassis Fan Header No Front PCI Fan Header Yes Front Control Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Yes Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Yes Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 100-240 VAC	Serial	1 rear port				
HD Integrated Audio CD-ROM input/Audio No AUX INPUT; Audio IEEE 1394 Connector(s) Internal USB Connector(s) Internal INO Internal INO INO INO INO INO INO INO INO INO IN	2nd Serial	Yes- requires optional Serial Port Adaptor	r			
CD-ROM input/Audio No No IEEE 1394 Connector(s) Front 1 IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1	Parallel	1 internal header (optional parallel port c	adaptor required)			
CD-ROM input/Audio No No IEEE 1394 Connector(s) Front 1 IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear No IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1394a (requires optional PCI card to function) Rear IEEE 1	HD Integrated Audio	High Definition Integrated Realtek ALC26	1 Audio with Line in, Line Out, Microphone, Headphone			
Front	CD-ROM input/Audio					
Rear No Internal No No	AUX INPUT; Audio					
Internal No USB Connector(s) Front 4 USB 2.0 Rear 6 USB 2.0 Internal 4 USB 2.0 Internal 4 USB 2.0 Internal 4 USB 2.0 Flash ROM Yes CPU Fan Header Not applicable - passive CPU heatsink Chassis Fan Header No Front PCI Fan Header Yes Front Control Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED 8 Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 90-264 VAC Rated Voltage Range 100-240 VAC	IEEE 1394 Connector(s)	Front	1 IEEE 1394a (requires optional PCI card to function)			
Front		Rear	No			
Rear 6 USB 2.0 Internal 4 USB 2.0 Flash ROM Yes CPU Fan Header Not applicable - passive CPU heatsink Chassis Fan Header No Front PCI Fan Header Yes Front Control Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 90-264 VAC Rated Voltage Range		Internal	No			
Internal 4 USB 2.0 Flash ROM Yes CPU Fan Header Not applicable - passive CPU heatsink Chassis Fan Header Yes Front PCI Fan Header Yes Front Control Yes CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Yes Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 90-264 VAC Rated Voltage Range 100-240 VAC	USB Connector(s)	Front	4 USB 2.0			
Flash ROM CPU Fan Header Not applicable - passive CPU heatsink Chassis Fan Header No Front PCI Fan Header Front Control Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply Power Supply Power Supply Power Supply Power Switch, Power LED A Hard Drive LED Header Clear Password Jumper Ves Keyboard/Mouse USB or PS/2 Power Supply Power Sup		Rear	6 USB 2.0			
CPU Fan Header Not applicable - passive CPU heatsink Chassis Fan Header Yes Front PCI Fan Header Yes Front Control Yes Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Yes Power Switch, Power LED & Haader Clear Password Jumper Yes Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 100-240 VAC		Internal	4 USB 2.0			
Chassis Fan Header Yes Front PCI Fan Header Yes Front Control Yes Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply Qayow, 89% efficiency Operating Voltage Range 100-240 VAC	Flash ROM	Yes				
Front PCI Fan Header Front Control Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply Q40W, 89% efficiency Operating Voltage Range 100-240 VAC	CPU Fan Header	Not applicable - passive CPU heatsink				
Front Control Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 100-240 VAC	Chassis Fan Header	No				
Panel/Speaker Header CMOS Battery Holder - Lithium Integrated Trusted Platform Module Power Supply Headers Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 100-240 VAC	Front PCI Fan Header	Yes				
Lithium Integrated Trusted Platform Module Power Supply Headers Yes Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Yes Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 90-264 VAC Rated Voltage Range 100-240 VAC	l .	Yes				
Platform Module Power Supply Headers Power Switch, Power LED & Hard Drive LED Header Clear Password Jumper Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 90-264 VAC Rated Voltage Range		Yes				
Power Switch, Power LED & Yes & Hard Drive LED Header Clear Password Jumper Yes Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 90-264 VAC Rated Voltage Range 100-240 VAC		Integrated TPM 1.2				
& Hard Drive LED Header Clear Password Jumper Yes Keyboard/Mouse USB or PS/2 Power Supply 240W, 89% efficiency Operating Voltage Range 90-264 VAC Rated Voltage Range 100-240 VAC	Power Supply Headers	Yes				
Keyboard/MouseUSB or PS/2Power Supply240W, 89% efficiencyOperating Voltage Range90-264 VACRated Voltage Range100-240 VAC		Yes				
Power Supply 240W, 89% efficiency Operating Voltage Range 90-264 VAC Rated Voltage Range 100-240 VAC	Clear Password Jumper	Yes				
Operating Voltage Range90-264 VACRated Voltage Range100-240 VAC	Keyboard/Mouse	USB or PS/2				
Rated Voltage Range 100-240 VAC	Power Supply	240W, 89% efficiency				
	Operating Voltage Range	90-264 VAC				
Rated Line Fraguency 50/60 Hz	Rated Voltage Range	100-240 VAC				
Nation line (Tequency 50/00 Fiz	Rated Line Frequency	50/60 Hz				



Operating Line Frequency Range	47-63 Hz
Rated Input Current	4A
Heat Dissipation	Typical 580 btu/hr (146 kg-cal/hr) Maximum 941 btu/hr (237 kg-cal/ hr)
Power Supply Fan	92x25 mm variable speed
ENERGY STAR® qualified (Config Dependent)	Yes
80 PLUS Compliant	Yes
FEMP Standby Power Compliant	Yes
Power consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3)	<5W
Built-in Self Test (BIST) LED	No
Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	Yes
Hood Lock Header	Yes

Declared Noise Emissions (Entry-level and High-end configurations)					
System Configuration	Processor Info	Intel i5-670, 3.46 GHz			
(Entry level)	Memory Info	2 x 2GB DDR3 1333 MHz			
	Graphics Info	Integrated Graphics			
	Disks/Optical/Floppy	1 x 160 GB 7200 RPM SATA / DVD-ROM / No Floppy			

Declared Noise Emissions		Sound Power (LWAd, bels)	Deskside Sound Pressure
	Idle	3.3 Bels	18.9 dB
	SATA Hard drive Operating (random reads)	3.3 Bels	19.2 dB
	Floppy Drive Operating (continuous copy)	N/A	N/A
	DVD-ROM Operating (sequential reads)	4.8 Bels	35.3 dB



-	Processor Info	ntel Xeon Processor X3470 Lynnfield 2.93 GHz		
(High-end)	Memory Info	4 x 2GB DDR3 1333 MHz		
	Graphics Info	NVIDIA Quadro FX 380LP		
	Disks/Optical/Floppy	2 x 500 GB 7200 SATA / DVD-ROM / No Floppy		

Declared Noise Emissions		Sound Power (LWAd, bels)	Deskside Sound Pressure
(in accordance with ISO	Idle	3.5 Bels	20.4 dB
7779 and ISO 9296)	Hard drive Operating (random reads)	3.6 Bels	21.7 dB
	Floppy Drive Operating (continuous copy)	N/A	N/A
	DVD-ROM Operating (sequential reads)	5.0 Bels	36.9 dB

System Configuration	System Configuration							
Example Configuration	Processor Info	Intel Core i3-530 Processor 2.93GHz						
#1	Memory Info	2x 2GB DDR3 1333 (UDIMM)						
	Graphics Info	NVIDIA Quadro NVS295						
	Disks/Optical/Floppy	1x160GB SATA / 1 Optical						
	PSU	240W 89% Efficient						

Energy Consumption	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	41.02 W		42.63 W		41.63 W	
Windows Busy Typ (S0)	92.25 W		91.20 W		92.18 W	
Windows Busy Max (S0)	111.34 W		110.49 W		112.17 W	
Sleep (S3)	2.89 W	2.82 W	3.22 W	3.14 W	2.86 W	2.79W
Off (S5)	0.84 W	0.76 W	1.12 W	1.04 W	0.82 W	0.73 W
Zero Power Mode (EuP)	0.66 W		0.85 W		0.65W	

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	139.96 btu/hr		145.46 btu/hr		142.05 btu/hr	
Windows Busy Typ (S0)	314.77 btu/hr		311.18 btu/hr		314.53 btu/hr	
Windows Busy Max (S0)	379.90 btu/hr		377.00 btu/hr		382.73 btu/hr	
Sleep (S3)	9.86 btu/hr	9.62 btu/hr	10.99 btu/hr	10.71btu/hr	9.76 btu/hr	9.52 btu/hr
Off (\$5)	2.87 btu/hr	2.59 btu/hr	3.82 btu/hr	3.55 btu/hr	2.80 btu/hr	2.49 btu/hr
Zero Power Mode (EuP)	2.25 btu/hr		2.90 btu/hr		2.22 btu/hr	



System Configuration	System Configuration						
#2	Processor Info	1x Intel Xeon X3460 2.8GHz					
	Memory Info	4x 2GB DDR3 1333MHz (UDIMM)					
	Graphics Info	1x FX380 LP					
	Disks/Optical/Floppy	1x 160GB SATA / 1 Optical					
	PSU	240W 89% Efficient					

Energy Consumption	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	39.03 W		40.19 W		39.60 W	
Windows Busy Typ (S0)	172.32 W		170.05 W		174.66 W	
Windows Busy Max (S0)	217.59 W		212.36 W		220.49 W	
Sleep (S3)	3.35 W	3.26 W	3.96 W	3.62 W	3.32 W	3.25 W
Off (S5)	0.84 W	0.75 W	1.12 W	1.04 W	0.82 W	0.73 W
Zero Power Mode (EuP)	0.66 W		0.85 W		0.65W	

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	133.17 btu/hr		137.13 btu/hr		135.12 btu/hr	
Windows Busy Typ (S0)	587.97 btu/hr		580.23 btu/hr		595.96 btu/hr	
Windows Busy Max (S0)	742.44 btu/hr		724.59 btu/hr		752.33 btu/hr	
Sleep (S3)	11.4 btu/hr	11.1 btu/hr	13.5 btu/hr	12.3 btu/hr	11.3 btu/hr	11.1 btu/hr
Off (S5)	2.87 btu/hr	2.56 btu/hr	3.82 btu/hr	3.55 btu/hr	2.80 btu/hr	2.49 btu/hr
Zero Power Mode (EuP)	2.25 btu/hr		2.90 btu/hr		2.22 btu/hr	

System Configuration	System Configuration							
"0 '5' '5DOY 6T4B	Processor Info	1x Intel Xeon X3470 2.93GHz						
	Memory Info	4x 4GB DDR3 1333MHz (UDIMM)						
	Graphics Info	2x NVS295						
	Disks/Optical/Floppy	2x1000GB SATA / 1 Optical						
	PSU	240W 89% Efficient						

Energy Consumption	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
On-Idle (ENERGY STAR® Idle (S0))	62.40 W		62.05 W		62.42 W	
ENERGY STAR® "Sleep" (S3)	3.84 W	-	4.05 W	-	3.84 W	-
ENERGY STAR® "Standby" (Off) (S5)	0.87 W	-	1.03 W	-	0.86 W	-



System Technical Specifications

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
On-Idle (ENERGY STAR® Idle (S0))	212.92 btu/hr		211.72 btu/hr		212.98 btu/hr	
ENERGY STAR® "Sleep" (S3)	13.1 btu/hr	-	13.8 btu/hr	-	13.1 btu/hr	-
ENERGY STAR® "Standby" (Off) (S5)	2.97 btu/hr	-	3.51 btu/hr	-	2.93 btu/hr	-

NOTES:

^{**} Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour. This product is in compliance with US executive order 13221.

Environmental Requirements	Temperature	Operating: 40° to 95° F (5° to 35° C) Non-operating: -40° to 140° F (-40° to 60° C)	
	Humidity	Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing	
	Maximum Altitude	Operating: 10,000 feet (3,000 m) Non-operating: 30,000 feet (9,100 m)	
	Dynamic (new)	Shock Operating: ½-sine: 40g, 2-3ms Non-operating: ½-sine: 160 cm/s, 2-3ms (~100g) square: 422 cm/s, 20g Vibration Operating random: 0.5g (rms), 5-300 Hz Non-operating random: 2.0g (rms), 10-500 Hz NOTES: Values represent individual shock events and do not indicate repetitive shock events. Values do not indicate continuous vibration.	
	Cooling	Above 5,000 ft (1524 m) altitude, maximum operating temperature is derated by 1.8° F (1° C) per 1,000 ft (305 m) elevation increase	

Physical Security and Serviceability			
Access Panel	Tool-less Includes system board and memory information		
Expansion Cards	Tool-less		
Processor Socket	Tool-less, except for the processor heatsink.		
Green User Touch Points	Yes, on tool-free internal chassis mechanisms		
Color-coordinated Cables and Connectors	Yes		
Memory	Tool-less		
System Board	Screw-In		



^{*} Energy Star low energy mode

HD LED on Front of Computer Configuration Record SW Yes Over-Temp Warning on Screen Restore CD/DVD Set Restores the computer to its original factory shipping image - Can be obtained via HP Support Power Switch Padlack Support Ves, causes a fail-safe power off when held for 4 seconds Power Switch Padlack Support Ves, kensington Cable Lock (aptional): Locks side cover and secures chassis from theft 0.22-in diameter padlack loop at rear of system Cable Lock Support Ves, kensington Cable Lock (aptional): Locks side cover and secures chassis from theft 3 mm x 7 mm shot at rear of system Universal Chassis Clamp Ves (aptional): Locks side cover and locks cables to chassis. Secures chassis from theft Threaded feature at rear of system Salenoid Lock and Hood Sensor Ves (aptional) Ves	i a a a a a a a a a a a a a a a a a a a	
Complete Configuration Record SW Yes Over-Temp Worning on Screen Restore CD/DVD Set Dual Function Front Power Switch Padlock Support Ves (optional): Locks side cover and secures chassis from theft 0,22-in diameter padlock loop at rear of system Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and secures chassis from theft 3 mm x 7 mm slot at rear of system Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and locks cables to chassis. Secures chassis from theft am x 7 mm slot at rear of system Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and locks cables to chassis. Secures chassis from theft am x 7 mm slot at rear of system Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system Ves (optional) Seensor Ves (optional) Ves, conserved Ves comments the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed Ves (optional) Ves, enables or disables serial, USB, audio, and network ports Audio, Network, Enable/Disable Port Control Vesting/Boal Control V	Dual Color Power and	Yes
Configuration Record SW Over-Temp Warning on Screen Restore CD/DVD Set Restore CD/DVD Set Restore CD/DVD Set Restore of Switch Podlack Support Cable Lock Support Cab		
Over-Temp Warning on Screen Restore CD/DVD Set Dual Function Front Rewer Switch Padlock Support Cess (optional): Locks side cover and secures chassis from theft 0.22-in diameter padlock loop at rear of system Threaded feature at rear of system Universal Chassis Clamp Lock Support Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and secures chassis from theft 3 max 7 mm slot at rear of system Universal Chassis Clamp Lock Support Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system Solenoid Lock and Hood Sensor Solenoid Lock and Hood Sensor Solenoid Lock and Hood Sensor Ves (optional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system Yes (optional): The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed Yes, locks rear IO cables to prevent cable theft Yes, enables or disables serial, USB, audio, and network ports Franchel/Disable Port Control Removable Media Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media) Yes, prevents an unauthorized person from changing the workstation configuration 3 Vax Na Power LED on System PCA No CEUS (integrated) Yes, ACPI multi-function Power LED Yes, ACPI multi-function Yes, ACPI multi-function Yes, ACPI multi-function Yes, System/Finergency ROM Flash Recovery Air cooled forced convection Air cooled forced convection	·	
Restore CD/DVD Set Dual Function Front Power Switch Padlock Support Ves (optional): Locks side cover and secures chassis from theft 0.22-in diameter padlock loop at rear of system Cable Lock Support Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and secures chassis from theft 0.22-in diameter padlock loop at rear of system Cable Lock Support Universal Chassis Clamp Lock Support Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and secures chassis from theft 3 mm x 7 mm slot at rear of system Universal Chassis Clamp Lock Support Universal Chassis Clamp Lock Support Ves (optional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system Ves (optional) The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed Rear Port Control Cover Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control Removable Media Write/Boot Control Removable Media Write/Boot Control Power-On Password Ves, prevents an unauthorized person from booting up the workstation Setup Password Ves, prevents an unauthorized person from changing the workstation configuration Ves, prevents an unauthorized person from changing the workstation configuration Ves, prevents an unauthorized person from changing the workstation configuration Ves, prevents an unauthorized person from changing the workstation configuration Ves, prevents an unauthorized person from changing the workstation configuration Ves, prevents an unauthorized person from changing the workstation configuration Ves, prevents an unauthorized person from changing the workstation configuration Ves, prevents an unauthorized person from changing the workstation configuration Ves, ACPI multi-function Ves, ACPI multi-funct		
Dual Function Front Power Switch Padlock Support Ves. (captional): Locks side cover and secures chassis from theft 0.22 in diameter padlock loop at rear of system Cable Lock Support Ves. (captional): Locks side cover and secures chassis from theft 3 mm x 7 mm shot at rear of system Ves. (potional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system Solenoid Lock and Hood Sensor Solenoid Lock and Hood Sensor Solenoid Lock and Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed Rear Port Control Cover Yes, locks rear IO cables to prevent cable theft Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control Removable Media Write/Boot Control Power-On Password Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media) Setup Password Yes, prevents an unauthorized person from booting up the workstation Setup Password Yes, prevents an unauthorized person from changing the workstation configuration 3.3V Aux Power LED on System PCA NIC LEDs (integrated) Yes (Green & Amber) CPUs and Heatsinks A 1-15 Tox or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power Button Power Button Yes, ACPI multi-function Power Button Yes, Jeren Yes, Serian, Parallel, USB, Alic (Bult) Hard drive activity LED Yes, green Internal speaker Yes System/Emergency ROM Air cooled forced convection	Over-Temp Warning on Screen	Yes
Power Switch Padlock Support Yes (optional): Locks side cover and secures chassis from theft 0.22-in diameter padlock loop at rear of system Cable Lock Support Yes, Kensington Cable Lock (optional): Locks side cover and secures chassis from theft 3 mm x 7 mm slot at rear of system Universal Chassis Clamp Lock Support Universal Chassis Clamp Lock Support Solenoid Lock and Hood Solenoid Lock and Hood Sensor Solenoid Lock and Hood Sensor Wes (optional) The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel host been removed. Rear Port Control Cover Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control Control Removable Media Write/Boot Control Power-On Password Yes, prevents an unauthorized person from booting up the workstation Setup Password Yes, prevents an unauthorized person from changing the workstation configuration 3.3V Aux Power LED on System PCA NIC LEDs (integrated) Green & Amber) CPUs and Heatsinks A T-1.5 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power Button Power LED Yes, blue (normal), red (fault) Hard drive activity LED Yes, System/Emergency ROM Flosh Recovery Cooling Solutions Air cooled forced convection	Restore CD/DVD Set	Restores the computer to its original factory shipping image - Can be obtained via HP Support
Cable Lock Support Yes, Kensington Cable Lock (optional): Locks side cover and secures chassis from theft 3 mm x 7 mm slot at rear of system Universal Chassis Clamp Lock Support Solenoid Lock and Hood Sensor Solenoid Lock and Hood Sensor Yes (optional): Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed Rear Port Control Cover Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control Control Write/Boot Control Write/Boot Control Password Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media) Power-On Password Yes, prevents an unauthorized person from changing the workstation configuration 3.3V Aux Power LED on System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks AT-15 Tox or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power Button Power Button Pess green Yes, green Internal speaker Yes System/Pemergency ROM Recovery Cooling Solutions Air cooled forced convection	Dual Function Front Power Switch	Yes, causes a fail-safe power off when held for 4 seconds
Universal Chassis Clamp Lock Support Yes (optional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system Solenoid Lock and Hood Sensor Yes (optional) The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed Rear Port Control Cover Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control Removable Media Write/Boot Control Removable Media Write/Boot Control Rossword Yes, prevents an unauthorized person from booting up the workstation Setup Password Yes, prevents an unauthorized person from changing the workstation configuration 3.3Y Aux Power LED on System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks A T-15 Torx or flot blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power supply diagnostic LED Power Button Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Yes System/Emergency ROM Flosh Recovery Cooling Solutions Air cooled forced convection	Padlock Support	
Lock Support multiple units to be chained together when used with optional cable Threaded feature at rear of system Solenoid Lock and Hood Sensor Sensor Sensor Findle (Disable Port Control Cover) Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control Removable Media Write/Boot Control Setup Password Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media) Power-On Password Yes, prevents an unauthorized person from booting up the workstation System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power LED Power LED Yes, ACPI multi-function Power LED Yes, green Necovers corrupted system BIOS. Recovery Cooling Solutions Air cooled forced convection	Cable Lock Support	
Sensor The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed Rear Port Control Cover Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control Removable Media Write/Boot Control Removable Media Write/Boot Control Removable Media Write/Boot Control Removable Media Wres, prevents ability to boot from removable media on supported devices (and can disable writes to media) Yes, prevents an unauthorized person from booting up the workstation Setup Password Yes, prevents an unauthorized person from changing the workstation configuration 3.3V Aux Power LED on System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power Button Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED (Integrated) Yes, green Internal speaker System/Emergency ROM Plash Recovery Cooling Solutions Air cooled forced convection	Universal Chassis Clamp Lock Support	multiple units to be chained together when used with optional cable
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control Removable Media Write/Boot Control Power-On Password Setup Password System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks Power supply diagnostic LED Power Button Power LED Power Button Power LED Power Button Power LED Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions Yes, prevents an unauthorized person from booting up the workstation Post from changing the workstation configuration Yes Yes Yes (and can disable writes to media) Yes, prevents an unauthorized person from booting up the workstation Yes Yes, prevents an unauthorized person from changing the workstation configuration Yes Yes Yes Yes Yes Yes Yes Yes	Solenoid Lock and Hood Sensor	The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The
Audio, Network, Enable/Disable Port Control Removable Media Write/Boot Control Removable Media Write/Boot Control Removable Media Power-On Password Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media) Power-On Password Yes, prevents an unauthorized person from booting up the workstation Setup Password Yes, prevents an unauthorized person from changing the workstation configuration 3.3V Aux Power LED on System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power supply diagnostic LED Power Button Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Yes, green Internal speaker Yes System/Emergency ROM Flash Recovery Cooling Solutions Air cooled forced convection	Rear Port Control Cover	Yes, locks rear IO cables to prevent cable theft
Write/Boot Control Power-On Password Yes, prevents an unauthorized person from booting up the workstation Yes, prevents an unauthorized person from changing the workstation configuration 3.3V Aux Power LED on System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power supply diagnostic LED Power Button Power LED Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions Air cooled forced convection	Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Yes, enables or disables serial, USB, audio, and network ports
Setup Password 3.3V Aux Power LED on System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks Power supply diagnostic LED Power Button Power LED Yes, blue (normal), red (fault) Hard drive activity LED Ves, green Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions Yes Yes Yes Yes Yes Yes Yes Yes Yes Y	Removable Media Write/Boot Control	
3.3V Aux Power LED on System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power supply diagnostic LED Power Button Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less	Power-On Password	Yes, prevents an unauthorized person from booting up the workstation
3.3V Aux Power LED on System PCA NIC LEDs (integrated) (Green & Amber) CPUs and Heatsinks A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power supply diagnostic LED Power Button Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less	Setup Password	Yes, prevents an unauthorized person from changing the workstation configuration
(Green & Amber) CPUs and Heatsinks A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power supply diagnostic LED Power Button Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less No Recover supply diagnostic Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Yes, green Internal speaker Air cooled forced convection	3.3V Aux Power LED on System PCA	
CPUs and Heatsinks A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less Power supply diagnostic LED Power Button Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Yes, green Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions Air cooled forced convection	NIC LEDs (integrated) (Green & Amber)	Yes
Power Button Yes, ACPI multi-function Power LED Yes, blue (normal), red (fault) Hard drive activity LED Yes, green Internal speaker Yes System/Emergency ROM Flash Recovery Cooling Solutions Air cooled forced convection	CPUs and Heatsinks	
Power LED Yes, blue (normal), red (fault) Hard drive activity LED Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions Yes, green Yes Recovers corrupted system BIOS. Air cooled forced convection	Power supply diagnostic LED	No
Hard drive activity LED Yes, green Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions Air cooled forced convection	Power Button	Yes, ACPI multi-function
Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions Yes Recovers corrupted system BIOS. Air cooled forced convection	Power LED	Yes, blue (normal), red (fault)
Internal speaker System/Emergency ROM Flash Recovery Cooling Solutions Yes Recovers corrupted system BIOS. Air cooled forced convection	Hard drive activity LED	Yes, green
Flash Recovery Cooling Solutions Air cooled forced convection	Internal speaker	
	System/Emergency ROM Flash Recovery	Recovers corrupted system BIOS.
Power Supply Fans 92 mm x 92 mm x 25 mm 4-wire PWM (non-serviceable)	Cooling Solutions	Air cooled forced convection
i la la companya di l	Power Supply Fans	92 mm x 92 mm x 25 mm 4-wire PWM (non-serviceable)



CDULL L F (.)	National Court of the Court of			
	Not applicable- CPU heatsink is passive. 92 mm x 92mm x 25 mm 4-wire PWM			
Chassis Fans				
Memory Fans HP Vision Diagnostics Offline Edition	HP Vision Diagnostics Offline Edition The diagnostics utility must be booted from USB or CD, and enables you to perform testing and to view critical computer hardware and software configuration information from various sources. This utility enables you to:			
	 Run diagnostics View the hardware configuration of the system 			
	Key features and benefits: HP Vision Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest insight into potential system issues, is the configuration of the system. Vision Diagnostics helps provide higher system availability. Typical uses of the Insight Diagnostics are:			
	 Testing and diagnosing apparent hardware failures Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance Sending configuration information to another location for more in-depth analysis 			
Access Panel Key Lock	No			
ACPI-Ready Hardware	 Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system 			
Trusted Platform Module Chip with optional ProtectTools Software	Yes			
Integrated Chassis Handles	No			
Power Supply	Tool-less			
PCI Card Retention	Yes, rear (all), middle (none), front (none)			
Flash ROM	Yes			
Diagnostic Power Switch LED on board	Yes			
Clear Password Jumper	Yes			
Clear CMOS Button	Yes			
CMOS Battery Holder for easy Replacement	Yes			
DIMM Connectors for easy Upgrade	Yes			
HP ProtectTools Security Manager	Yes - Not supported on Microsoft XP x64 or Linux			



BIOS			
BIOS 32-bit Services	Standard BIOS 32-bit Service Directory Proposal v0.4		
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces.		
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0.		
BBS	BIOS Boot Specification v1.01.		
WMI Support	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.		
BIOS Boot Spec 1.01+	Provides more control over how and from what devices the workstation will boot.		
BIOS Power On	Users can define a specific date and time for the system to power on.		
ROM Based Computer Setup Utility (F10)	Review and customize system configuration settings controlled by the BIOS.		
System/Emergency ROM Flash Recovery with Video	Recovers system BIOS in corrupted Flash ROM.		
Replicated Setup	Saves BIOS settings to USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).		
SMBIOS	System Management BIOS 2.6, for system management information.		
Boot Control	Disables the ability to boot from removable media on supported devices.		
Memory Change Alert	Alerts management console if memory is removed or changed.		
	 NORMAL - normal temperature ranges. ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown. SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs. 		
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console.		
ACPI (Advanced Configuration and Power Management Interface)	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.		
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen.		
Remote Wakeup/Remote Shutdown	System administrators can power on, restart, and power off a client computer from a remote location.		
ASF 2.0 Compliant	Allows workstation status to be monitored on a remote console.		
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time.		
Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system.		



System Technical Specifications

ROM revision levels	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information.		
System board revision level	Allows management SW to read revision level of the system board. Revision level is digitally encoded into the HW and cannot be modified.		
Start-up Diagnostics (Power-on Self-Test)	Assesses system health at boot time with selectable levels of testing.		
Auto Setup when new hardware installed	System automatically detects addition of new hardware.		
Keyboard-less Operation	The system can be booted without a keyboard.		
Localized ROM Setup	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings.		
Asset Tag	The user or MIS to set a unique tag string in non-volatile memory.		
Per-slot Control	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually.		
Adaptive Cooling	Control parameters are set according to detected hardware configuration for optimal acoustics.		
Pre-boot Diagnostics	(Pre-video) critical errors are reported via beeps and blinks on the power LED.		
Intel® Active Management Technology (AMT)	Allows workstation status to be monitored on a remote console		
Industry Standard Specification Support			
Industry Standard	Revision Supported by the BIOS		
ACPI	Advanced Configuration and Power Management Interface, Version 1.0		
ASF	Alert Standard Format Specification, Version 2.0		
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b		
CD Boot	"El Torito" Bootable CD-ROM Format Specification Version 1.0		
EDD	 Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0 		
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0		
PCI	PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7		
PCI Express	PCI Express Base Specification, Revision 2.0		
PMM	POST Memory Manager Specification, Version 1.01		
SATA	 Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0 		
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B		
TPM	Trusted Computing Group TPM Specification Version 1.2		
USB	Universal Serial Bus Revision 1.1 Specification		
USB 2.0	Universal Serial Bus Revision 2.0 Specification		
SMBIOS	System Management BIOS Reference Specification, Version 2.6		

Social	and	Environmento	al Res	ponsibility
--------	-----	--------------	--------	-------------

Eco-Label Certifications & This product has received or is in the process of being certified to the following approvals and may be



system Technical Spe	semediforis .
Declarations	labeled with one or more of these marks:
	 ENERGY STAR® (energy-saving features available on selected configurations -Windows only) US Federal Energy Management Program (FEMP) China Energy Conservation Program IT ECO declaration
	Japan PC Green label*
	EPEAT Gold® for all ENERGY STAR® configurations. For more details and a list of countries in which this product is registered, please visit the following link: http://www.epeat.net/ProductDisplay.aspx?return=search&action=view&search=true&productid=4611&ProductType=5&epeatcountryid=1
	*This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'
Recycled Content and	The Corrugated Carton packaging material is made from 100% recycled content.
Design for Recycling	The EPE - Expanded Polyethylene packaging material is made from 100% recycled content The Polyethylene low density foam packaging material is made from 100% recycled content. Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to:
	http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office.
D	Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
Batteries	Battery size: CR2032 (coin cell) Battery type: Lithium Metal.
	This product complies with ISO standards:
	 EU Directive 91/157/EEC EU Directive 93/86/EEC
	EU Directive 98/101/ EEC Batteries used in the product do not contain:
	Mercury greater than 5ppm by weight
	 Cadmium greater than 10ppm by weight Lead greater than 4000ppm by weight.
Restricted Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:
	http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html): • Asbestos
	 Batteries – Mercury Batteries – Cadmium Batteries – Lead (non-rechargeable)
	 Batteries – Non-rechargeable Alkaline and Carbon-Zinc Batteries Batteries – Classification as "Not Restricted" for Transport Brominated Flame Retardants (PBBs, PBDEs, including DecaBDE) Brominated Flame Retardants (all BFRs in external case plastic parts)
	 Cadmium and its compounds Certain Azo Colorants Chlorinated Hydrocarbons Chlorinated Paraffins Formaldehyde



system rechnical spe	CITICATIONS		
	 Formaldehyde – emissions Hexavalent Chromium and its compounds in metallic applications Hexavalent Chromium and its compounds in non-metallic applications Lead and its compounds Lead in paint Lead in Polyvinyl Chloride (PVC) coating of external cables, wires and cords Mercury and its compounds Nickel on external surfaces Ozone Depleting Substances (ODS) Polycyclic Aromatic Hydrocarbons (PAH) Perfluorooctane sulfonates (PFOS) in parts Perfluorooctane sulfonates (PFOS) in preparations Polychlorinated Biphenyls (PCBs) and Polychlorinated Terphenyls (PCTs) Polychlorinated Naphthalenes Polyvinyl Chloride (PVC) in external case plastic parts Radioactive Substances Tributyl Tin (TBT) Triphenyl Tin (TPT) Tributyl Tin Oxide (TBTO) 		
Packaging	Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) HP follows these guidelines to decrease the environmental impact of product packaging:		
	 Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. 		
Packaging Materials			
External	Corrugated 2550 g The corrugated packaging material is made from 37% recycled content.		
Internal	Polyethylene high density 160 g. The Polyethylene high density packaging material is made from 100% recycled content.		
End-of-Life Management and Recycling	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. [link to new HP white paper now in progress] Global Citizenship Report: http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications: http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html		
Hewlett-Packard Corporate Environmental Information	For more information about HP's commitment to the environment: Global Citizenship Report: http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications: http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html		
Service, Support and Warranty	On-site Warranty and Service (Note 1): One and three-years, limited warranty and service offering delivers on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 8am - 5pm. Global coverage (Note 2) ensures that any product purchased in one country and transferred		



	to another, non-restricted country will remain fully covered under the original warranty and service offering
	NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country. NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries. HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: http://www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at: http://www.hp.com/hps/carepack. Service levels and response times for HP Care Packs may vary depending on your geographic location.
Additional Information	 This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. Plastic parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. This product contains 0% recycled materials (by weight) This product is >90% recycle-able when properly disposed of at end of life.

Manageability	
_	Visit: http://www.hp.com/go/easydeploy
Solutions	
Product Change Notification	 Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile. PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition. Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.
Support Software CD & WWW	Yes
HP Client Manager	Visit: http://www.hp.com/go/easydeploy
System Software Manager	Visit: http://www.hp.com/go/ssm

Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section. HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers-no special programs, no additional cost-no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

Processors	Product #	Offering		
	WG013AV	Intel Core i5-650 3.2 4MB/1333 DC CPU		
	WG015AV	Intel Core i5-670 3.46 4MB/1333 DC CPU		
	WG019AV	Intel Xeon X3450 2.66 8MB/1333 QC CPU		
Hard Drives	Product #	Offering		
	WF996AV	HP 250GB SATA 7200 1st HDD		
	WG002AV	HP 250GB SATA 7200 2nd HDD		
	WF998AV	HP 500GB SATA 7200 1st HDD		
	WG004AV	HP 500GB SATA 7200 2nd HDD		
Graphics	Product #	Offering		
·	WF977AV	NVIDIA Quadro NVS 295 256MB Graphics		
	WF978AV	NVIDIA Quadro NVS 295 256MB Graphics (2nd)		
Memory	Product #	Offering		
	WG029AV	HP 2GB (2x1GB) DDR3-1333 ECC RAM		
	WG033AV	HP 4GB (2x2GB) DDR3-1333 ECC RAM		
	WG037AV	HP 8GB (4x2GB) DDR3-1333 ECC RAM		
Optical and Removable	Product #	Offering		
Storage	WG007AV	HP 16X DVD+-RW SuperMulti SATA Drive		
Input Devices	Product #	Offering		
•	VG956AV	HP USB Standard Keyboard		
	VB274AV	HP USB Optical Scroll Mouse		
Operating Systems	Product #	Offering		
	WF962AV	MS Windows 7 Professional 64-bit OS		



Technical Specifications - Processors

Processors

Intel® Pentium® Processor G6950 2.8 GHz, 3MB cache, 1066 MHz memory, Dual-Core Intel Core Processor i3-540 3.06 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT Intel Core Processor i3-550 3.20 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT Intel Core Processor i3-560 3.33 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT Intel Core Processor i5-650 3.20 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo Intel Core Processor i5-660 3.33 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo Intel Core Processor i5-670 3.46 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo Intel Core Processor i5-680 3.60 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo Intel Core Processor i5-680 3.60 GHz, 4MB cache, 1333 MHz memory, Dual-Core, HT, Turbo

Intel Core Processor i5-760 2.80 GHz, 8 MB cache, 1333 MHz memory, Quad-Core, Turbo Intel Core Processor i7-870 2.93 GHz, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel Core Processor i7-880 3.06 GHz, 8 MB cache, 1333 MHz memory, Quad-Core, HT, Turbo

Intel Xeon Processor X3430 2.40 GHz, 8MB cache, 1333 MHz memory, Quad-Core, Turbo Intel Xeon Processor X3440 2.53 GHz, 8MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel Xeon Processor X3450 2.66 GHz, 8MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel Xeon Processor X3470 2.93 GHz, 8MB cache, 1333 MHz memory, Quad-Core, HT, Turbo Intel Xeon Processor X3480 3.06 GHz, 8MB cache, 1333 MHz memory, Quad-Core, HT, Turbo



Technical Specifications - Hard Drives

SATA (Serial ATA) Hard Drives for HP Workstations 300GB SATA 10K rpm SFF in 3.5" Frame HDD **Capacity** 300,069,052,416 bytes

Height 1 in; 2.54 cm

Width Media Diameter 2.5 in; 6.36 cm

Physical Size 4.0 in; 10.17 cm

4.4 ms

9.5 ms

Interface Serial ATA (3.0 Gb/s), Native Command

Queuing enabled Up to 300MB/s

Synchronous Transfer

Rate (Maximum)

Buffer

16 MB

Seek Time (typical reads, Single Track 0.7 ms (maximum)

includes controller overhead, including settling)

Average

Full Stroke

Rotational Speed 10,000 rpm Logical Blocks 586,072,368

Operating Temperature 41° to 131° F (5° to 55° C)

160GB SATA 10K rpm SFF in 3.5" Frame HDD

Capacity 160,041,885,696 bytes

Height 1 in; 2.54 cm

Width Media Diameter 2.5 in; 6.36 cm

Physical Size 4 in; 10.17 cm

Interface Serial ATA (1.5 Gb/s), Native Command

Queuing enabled

Synchronous Transfer

Rate (Maximum)

Up to 300 MB/s

Buffer 16 MB

Seek Time (typical reads, Single Track 0.7 ms (maximum)

includes controller overhead, including settling)

Average 4.4 ms

Full Stroke 9.5 ms

Rotational Speed 10,000 rpm Logical Blocks 312,581,808

Operating Temperature 41° to 131° F (5° to 55° C)

1000GB (1TB) SATA 7200 rpm 3.0Gb/s 3.5" HDD **Capacity** 1,000,204,886,016 bytes

Height 1 in; 2.54 cm

Width Media Diameter 3.5 in; 8.9 cm

Physical Size 4 in; 10.17 cm

Interface Serial ATA (3.0 Gb/s), Native Command

Queuing enabled Up to 300 MB/s

Synchronous Transfer

Rate (Maximum)

Buffer 32 MB



Technical Specifications - Hard Drives

Seek Time (typical reads, Single Track 2 ms includes controller Average 11 ms overhead, including Full Stroke 21 ms settling)

Rotational Speed 7,200 rpm 1,953,525,168 Logical Blocks

Operating Temperature 41° to 131° F (5° to 55° C)

500GB SATA 7200 rpm 3Gb/s 3.5" HDD

Capacity 500,107,862,016 bytes

Height 1 in; 2.54 cm

Width Media Diameter 3.5 in; 8.9 cm

> Physical Size 4 in; 10.17 cm

Interface Serial ATA (3.0 Gb/s), Native Command

300 MB/s

16 MB

Queuing enabled

Synchronous Transfer

Rate (Maximum) Buffer

Seek Time (typical reads, Single Track 2 ms includes controller Average 11 ms overhead, including Full Stroke 21 ms settling)

Rotational Speed 7,200 rpm 976,773,168 Logical Blocks

Operating Temperature 41° to 131° F (5° to 55° C)

320GB SATA 7200 rpm 3Gb/s 3.5" HDD

Capacity 320,072,933,376 bytes

Height 1 in; 2.54 cm

Width Media Diameter 3.5 in; 8.9 cm Physical Size 4.0 in; 10.17 cm

Interface Serial ATA (3.0 Gb/s), Native Command

300 MB/s

Queuing enabled

Synchronous Transfer Rate (Maximum)

Buffer 8 MB

2 ms Seek Time (typical reads, Single Track includes controller 12 ms Average overhead, including Full Stroke 21 ms settling)

Rotational Speed 7,200 rpm 625,142,448 Logical Blocks

41° to 131° F (5° to 55° C) Operating Temperature

250GB SATA 7200 rpm 3Gb/s 3.5" HDD

Capacity 250,059,350,016 bytes

Height 1 in; 2.54 cm

Technical Specifications - Hard Drives

Width Media Diameter 3.5 in; 8.9 cm

Physical Size 4.0 in; 10.17 cm

Interface Serial ATA (3.0 Gb/s), Native Command

Queuing enabled

Synchronous Transfer 300 MB/s

Rate (Maximum)

Logical Blocks

Buffer 8 MB

Seek Time (typical reads, includes controller overhead, including settling)

Single Track 2 ms

Average 11 ms

Full Stroke 21 ms

Rotational Speed 7,200 rpm

Operating Temperature 41° to 131° F (5° to 55° C)

160GB SATA 7200 rpm 3Gb/s 3.5" HDD **Capacity** 160,041,885,696 bytes

Height 1 in; 2.54 cm

Width Media Diameter 3.5 in; 8.9 cm

488,397,168

Physical Size 4 in; 10.2 cm

Interface Serial ATA (3.0 Gb/s), Native Command

Queuing enabled

Synchronous Transfer 300 MB/s

Rate (Maximum)

Buffer 8 MB

Seek Time (typical reads,
includes controller
overhead, including
settling)Single Track
Average2 msAverage
Full Stroke11 ms

Rotational Speed 7,200 rpm Logical Blocks 312,581,808

Operating Temperature 41° to 131° F (5° to 55° C)



Technical Specifications - Hard Drives

HP Solid State Drives for Workstations

HP 160GB SATA X25-M

SSD

160,041,885,696 bytes Capacity

Height 0.28 in; 0.7 cm

Width Media Diameter NaN in; N/A cm 2.5 in; 6.36 cm

Physical Size

SATA Interface 3Gb/s Synchronous Transfer

Rate (Maximum)

Seek Time (typical reads, Average Read: 75

includes controller microseconds; Write: 85 microseconds overhead, including

settling)

312,581,808 Logical Blocks

Operating Temperature 32° to 158° F (0° to 70° C)



Technical Specifications - Graphics

Integrated Intel HD Graphics Media Accelerator (Z200) Form Factor Integrated

Graphics Controller Intel Integrated Graphics Media Accelerator HD

Bus Type PCI Express x16

Memory Graphics memory is shared with system memory. Graphics memory usage

varies depending on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content. For Vista, use of PAVP heavy mode preallocates an

additional 96MB.

Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between

graphics and system memory use.

Connectors Z200; 1 Single Link DVI-I, 1 DP

Z200 SFF; 1 VGA, 1 DP

Graphics adapters are orderable as an accessory as necessary.

Maximum Resolution DVI-I: 1920 x 1200

Display Port: 2560 x 1600

RAMDAC Integrated, 350 MHz

Display Output Z200: Integrated dual independent monitor support facilitated via one DVI

port and one DisplayPort integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces. Second DVI supported via optional DisplayPort to DVI-D adapter. VGA support via optional DVI to

VGA adapter or DisplyPort to VGA adapter.

Z200 SFF: Integrated dual independent monitor support facilitated via one VGA port and one DisplayPort integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces. Second VGA supported via optional DisplayPort to VGA adapter. DVI support via optional

DisplayPort to DVI adapter.

Intel HD graphics can provide audio to displays supporting audio over

DisplayPort or HDMI (via DisplayPort to HDMI adapter)

Supported Graphics APIs Microsoft DirectX 10, OpenGL 2.1



Technical Specifications - Graphics

NVIDIA Quadro NV\$ 295 Form Factor

256MB Graphics Card

Form Factor 2.731 inches (H) × 6.600 inches (L), Half-Height

Graphics Controller NVIDIA Quadro NVS 295 Graphics Board

Bus Type PCI Express x16, Generation 2.0

Memory 256 MB GDDR3 SDRAM unified graphics memory

Connectors 2 DisplayPort

Comes with 2 DisplayPort to DVI-D Adapters

('DisplayPort to VGA' and 'DisplayPort to DL DVI' adapters available as an

accessory)

Maximum Resolution Two DisplayPort outputs drive two digital displays up to 2560 x 1600

NOTE: This card supports up to two displays

• Drives DisplayPort enabled digital displays at resolutions up to 2560

× 1600 at 60 Hz with reduced blanking

 \bullet Drives DVI enabled digital displays at resolutions up to 1920 imes 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single

link) cable)

Supported Graphics APIs OpenGL 3.0

DirectX 10.0

Available Graphics Drivers Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit)

* WS4 not supported on Z200 & Z200 SFF

Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation (64-bit and 32-bit)

SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support

Web site: http://welcome.hp.com/country/us/en/support.html

SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com



Technical Specifications - Graphics

NVIDIA NV\$ 300 512MB Form Factor

Graphics Card

2.7 inches (H) x 5.7 inches (L), Half-Height

Graphics Controller NVIDIA NVS 300 Graphics Board

Bus Type PCI Express x16, Generation 2.0

Memory 512 MB GDDR3 SDRAM unified graphics memory

Connectors **DMS-59**

Includes DMS-59 to Dual DVI-I adapter

DMS-59 to Dual DisplayPort adapter and DMS-59 to Dual VGA adapter

available as an option

DMS-59 to Dual DisplayPort adapter required for HP ZR30w Display

Maximum Resolution DVI: two digital displays up to 1920 x 1200

> DisplayPort: two digital displays up to 2560 x 1600 VGA: two analog displays up to 1920 x 1080

Image Quality Features

Display Output

This card support up to two displays:

 \bullet Drives DVI enabled digital displays at resolutions up to 1920 imes 1200 at 60 Hz with reduced blanking

• Drives DisplayPort enabled digital displays at resolutions up to 2560 imes 1600 at 60 Hz with reduced blanking (through optional DMS-59 to DisplayPort adapter)

 Drives VGA enabled analog displays at resolutions up to 1920 x 1080 (through optional DMS-59 to VGA adapter)

Supported Graphics APIs

OGL 3.3

DirectX 10.1

Available Graphics Drivers

Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support

Web site: http://welcome.hp.com/country/us/en/support.html

Novell SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com



Technical Specifications - Graphics

NVIDIA Quadro FX 380 256MB Graphics Card

Form Factor 4.376 inches (H) \times 6.60 inches (L)

Graphics Controller NVIDIA Quadro FX 380 Graphics Board

Bus Type PCI Express x16, Generation 2.0

Memory 256 MB GDDR3 SDRAM unified graphics memory

Connectors 2 Dual-Link DVI-I

Two DVI to VGA adapters included

Maximum Resolution Two dual-link DVI-I outputs drive two digital displays at resolutions up to

2560 x 1600 @ 60Hz or two analog displays at resolutions up to 2048 x

1536 @ 85Hz

NOTE: This card supports up to two displays

RAMDAC Dual Internal 400 MHz DAC

Shading architecture Full Shader Model 4.0 (OpenGL 2.1/DirectX 10 class)

Long fragment programs (unlimited instructions)

• Long vertex programs (unlimited instructions)

Looping and subroutines (up to 256 loops per vertex program)

Dynamic flow control

Conditional execution

Supported graphics APIs OpenGL 3.0

DirectX 10.0

Available graphics drivers Genuine Windows 7 Professional (64-bit and 32-bit)

Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit)

* WS4 not supported on Z200 & Z200 SFF

Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support

Web site: http://welcome.hp.com/country/us/en/support.html

Novell SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com

Power Consumption 34 Watts

Technical Specifications - Graphics

ATI FirePro V3800 512MB Graphics Card Form Factor 2.71 in (H) x 6.61 in (L) "Single-Wide"

Graphics Controller ATI FirePro V3800 Graphics Board

Bus Type PCI Express x16, Generation 2.0

Memory 512 MB DDR3 SDRAM
Connectors 1 DL DVI, 1 DP output

One DP to DVI adapter included

Maximum Resolution Up to two digital displays at resolutions up to 2560 x 1600 @ 60Hz or two

analog displays, one at resolutions up to 2048 x 1536 @ 85Hz, the other at

up to 1920 x 1200 @ 60Hz (165 MHz dot clock) NOTES: This card supports up to two displays

Use of more than two displays on Linux requires support for xrandr 1.2 or

greater in the X server

RAMDAC 400 MHz DAC, 10-bits per channel

Image Quality Features

• Full 30-bit display pipeling

 Full 30-bit display pipeline for more accurate color reproduction superior image quality (30-bit monitor required for full 30-bit display)

 Advanced video capabilities, including high fidelity gamma, color correction and scaling

• Dedicated hardware (UVD2) for H.264, VC-1, and MPEG2 decode

Shading architecture • Support for Full Shader Model 5.0

• 400 Stream Processing Units

 Dynamic load balancing and resource allocation for vertex, geometry, and pixel shaders

 Common instruction set and texture unit access supported for all types of shaders

Dedicated branch execution units and texture address processors

Anti-aliases Shaders and Textures as well as Polygon Edges

Supported graphics APIs DirectX 11, OpenGL 3.2, OpenCL 1.0 and full implementation of

DirectCompute 11

(OpenCL[™] compliant driver and SDK release scheduled in 2010)

Available graphics drivers Genuine Windows 7 Professional (64-bit and 32-bit)

Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit)

Red Hat Enterprise Linux (RHEL) WS4

* WS4 not supported on Z200 & Z200 SFF

Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation

Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support

Web site: http://welcome.hp.com/country/us/en/support.html

Power Consumption 43 Watts



Technical Specifications - Graphics

NVIDIA Quadro 600 1GB Graphics Card Form Factor 2.731" H x 6.6" L

Single Slot

Small Form Factor

Graphics Controller NVIDIA Quadro 600 Graphics Card

Bus Type PCI Express 2.0 x16

Memory 1 GB GDDR3

128-bit

Connectors 1 DVI-I output, 1 DisplayPort output

One DP to DVI adapter included with card

DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available

as accessories

Maximum Resolution DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)

Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @

120Hz)

Shading Architecture Shader Model 5.0

Supported Graphics APIs OpenGL 4.0

DirectX 11

CUDA API support includes:

CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and

Fortran

Available Graphics

Drivers

Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) WS4 (64-bit and 32-bit)

* WS4 not supported on Z200 and Z200 SFF

Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)

Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support

Web site: http://welcome.hp.com/country/us/en/support.html

SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com

Power Consumption 40 Watts



Technical Specifications - Multimedia and Audio Devices

HP Thin USB Powered Speakers

Frequency Response (- 3dB, 24-bit/96kHz input)

FO to 20kHz

Dimensions $(H \times W \times D)$

Speakers: 14.52 x 9.50 x 2.45 cm (5.72 x 3.74 x 0.96 in) per speaker

Integrated Intel/Realtek HD ALC261 Audio Minimum System Requirements

Integrated



Technical Specifications - Optical and Removable Storage

HP DVD-ROM Drive Description 5.25-inch, half-height, tray-load

> Mounting Orientation Either horizontal or vertical

Interface Type SATA/ATAPI

Dimensions (WxHxD) 15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)

Disc Capacity DVD-ROM Single layer: Up to 4.7 GB Double layer: Up to

8.5 GB

Access Times DVD-ROM Single Layer < 140 ms (typical)

> CD-ROM Mode 1 < 125 ms (typical) Full Stroke DVD < 250 ms (seek) Full Stroke CD < 210 ms (seek)

Power Source SATA DC power receptacle

> **DC Power Requirements** $5 \text{ VDC} \pm 5\%\text{-}100 \text{ mV ripple p-p}$

 $12 \text{ VDC} \pm 5\%$ -200 mV ripple p-p

DC Current 5 VDC - < 1000 mA typical, < 1600 mA

maximum

12 VDC - < 600 mA typical, < 1400 mA

maximum

10% to 90%

30° C (86° F)

Operating Environmental Temperature 5° to 50° C (41° to 122° F)

(all conditions non-

condensing)

Relative Humidity

Maximum Wet Bulb

Temperature

Operating Systems

Supported

Windows 7 Professional 32-bit and 64-bit,

Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or

Windows XP Home 32*.

Red Hat Enterprise Linux (RHEL) WS4**, 5, 6

Desktop/Workstation

Removed reference to "Novell" because of acquisition and changed product reference to "SUSE Linux Enterprise Desktop 10 & 11", No driver is required for this device. Native support is provided by the operating system.

* Certain Windows Vista product features require advanced or additional hardware. See http://www.microsoft.com/windowsvista/ getready/hardwareregs.mspx and http://www.microsoft.com/windowsvista/ getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor.

Windows Vista Business disk also included for future upgrade if desired.

For Windows Vista system requirements, visit:



Technical Specifications - Optical and Removable Storage

http://www.windowsvista.com/systemrequirements.

** RHEL WS4 not supported on Z200/Z200SFF

HP DVD+/-RW Drive Description 5.25-inch, half-height, tray-load

> Mounting Orientation Either horizontal or vertical

Interface Type SATA/ATAPI

Dimensions (WxHxD) 15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)

Disc Formats DVD-RAM

DVD+RDVD + RWDVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW

Disc Capacity DVD-ROM 8.5 GB DL or 4.7 GB standard

> Full Stroke DVD < 250 ms (seek) Full Stroke CD < 210 ms (seek)

Maximum Data Transfer CD ROM Read

Rates

CD-ROM, CD-R Up to 40X

CD-RW Up to 32X

DVD ROM Read DVD-RAM Up to 12X

> DVD+RWUp to 8X DVD-RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 8X DVD-ROM Up to 16X DVD-ROM DL Up to 8X DVD+RUp to 16X DVD-R Up to 16X

Power Source SATA DC power receptacle

> DC Power Requirements $5 \text{ VDC} \pm 5\%\text{-}100 \text{ mV ripple p-p}$

> > 10% to 90%

30° C (86° F)

 $12 \text{ VDC} \pm 5\%$ -200 mV ripple p-p

DC Current 5 VDC -<1000 mA typical, <1600 mA maximum

12 VDC -<600 mA typical, <1400 mA maximum

5° to 50° C (41° to 122° F) **Operating Environmental Temperature**

(all conditions non-

condensing)

Relative Humidity Maximum Wet Bulb

Temperature

Operating Systems Supported

Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista

Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or

Windows XP Home 32*.

Technical Specifications - Optical and Removable Storage

Red Hat Enterprise Linux (RHEL) WS4**, 5, 6 Desktop/Workstation SUSE Linux Enterprise Desktop 10 & 11

No driver is required for this device. Native support is provided by the operating system.

*Certain Windows Vista product features require advanced or additional hardware. See http://microsoft.com/windowsvista/ getready/hardwarereqs.mspx and http://www.microsoft.com/windowsvista/ getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor. Windows Vista Business disk also included for future upgrade if desired.
For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements

Kit Contents

** RHEL WS4 not supported on Z200/Z200SFF

HP SATA SuperMulti DVD Writer Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide, and DVD+R media.

HP 22-in-1 Media Card Reader Description

The Media Card Reader device uses the same physical form factor and mounting as a Floppy Disk Drive. The device connects to a 2x5 two-channel USB header on the motherboard of the system. There is no USB controller card provided. Please see the Disc Formats section below for a list of flash memory card formats that are supported.

Mounting Orientation

The Media Card Reader can be mounted in a dedicated Floppy Drive bay (if the chassis provides one) or in an appropriate Optical Bay adapter. It will operate in any orientation.

Interface Type

USB 2.0 (one channel dedicated to the separate USB port; one channel dedicated to the flash memory card slots)

Dimensions (WxHxD)

124.5 x 101.6 x 25.4 mm (4.9 x 4.0 x 1.0 in)

Disc Formats

xD-Picture Micro SD Micro SDHC

SD SDHC SDXC Mini SD Mini SDHC

MultiMediaCard (MMC)

Reduced Size MultiMediaCard (RS MMC)

MultiMedia Card 4.2 (MMC Plus, including MMC Plus HC)



Technical Specifications - Optical and Removable Storage

Reduced Size MultiMedia Card 4.2 (MMC Mobile, including MMC Mobile

HC)

CompactFlash Card Type I CompactFlash Card Type II

MicroDrive

Memory Stick (MS)

MagicGate Memory Stick (MG) MagicGate Memory Stick Duo

Memory Stick Select

Memory Stick Duo (MS Duo) Memory Stick PRO (MS PRO)

Memory Stick PRO Duo (MS PRO Duo)

Memory Stick PRO-HG Duo

Two additional formats are usable with adapters (not supplied):

MMC Micro

Memory Stick Micro (M2)

HP Blu-Ray Writer

Description

5.25-inch, half-height, tray-load

Mounting Orientation

Either horizontal or vertical

Interface Type

SATA

Dimensions (WxHxD)

 $15.0 \times 4.4 \times 20.3 \text{ cm} (5.9 \times 1.7 \times 8.0 \text{ in})$

Disc Formats

BD-ROM

BD-R BD-RE DVD-RAM DVD+R DVD+RW DVD+R DL

DVD-R DL DVD-R DVD-RW CD-R

CD-RW **DVD-ROM**

Disc Capacity

8.5 GB DL or 4.7 GB standard

Blu-ray 50 GB DL or 25 GB standard

Startup Time BD-ROM (SL/DL) 25S / 28S

BD-R (SL/DL) 25S / 28S BD-RE (SL/DL) 25S / 28S DVD-ROM (SL/DL) 18S / 18S DVD-R (SL/DL) 25S / 25S DVD-RW 25S DVD+R (SL/DL) 25S / 25S

Technical Specifications - Optical and Removable Storage

		DVD+RW	25\$
		DVD-RAM	45\$
		CD-ROM	15\$
Maximum Data Transfer Rates	CD ROM Read	CD-ROM CD-R CD-RW	Up to 40X Up to 40X Up to 40X
	DVD ROM Read	DVD-RAM	Up to 5X
		DVD+RW	Up to 10X
		DVD-RW	Up to 10X
		DVD+RDL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 8X
		DVD+R	Up to 12X
		DVD-R	Up to 12X
	Blu-Ray	BD-ROM	Up to 6X
		BD-ROM DL	Up to 4.8X
		BD-R	Up to 6X
		BD-R DL	Up to 4.8X
		BD-R	Up to 6X
		BD-RE SL/DL	Up to 4.8X
Power	Source	SATA DC power receptacle	
	DC Power Requirements	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 10%-100 mV ripple p-p	
	DC Current	5 VDC -900 mA typical, 1200 mA maximum 12 VDC -1000 mA typical, 1600 mA maximum	
Operating Environmental (all conditions non-condensing)	Temperature	5° to 50° C (41° to 122° F)	
	Relative Humidity	15% to 80%	
	Maximum Wet Bulb Temperature	30° C (86° F)	
	Operating Systems Supported	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*,	

Windows 2000, Windows XP Professional or Windows XP Home 32*.

Red Hat Enterprise Linux (RHEL) WS4**, 5, 6

Desktop/Workstation

SUSE Linux Enterprise Desktop 10 & 11



^{*} No driver is required for this device. Native support is provided by the operating system.

^{**} RHEL WS4 not supported on Z200/Z200SFF

Technical Specifications - Optical and Removable Storage

Kit Contents HP Blue Laser RW Drive, Roxio Easy Media

Creator software, Intervideo WinDVD Software,

installation guide.

Disclaimer As Blu-Ray is a new format containing new technologies, certain disc, digital

connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-Ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support.

HD-DVD movies cannot be played on this workstation.



Technical Specifications - Controller Cards

HP FireWire/IEEE 1394a Data Transfer Rate
PCI Card Davids Interface Pr

Data Transfer Rate Burst Data Rate up to 400 Mbps

Device Interface Protocol IEEE-1394a

Devices Supported IEEE-1394 compliant devices

Bus Type PCI card with brackets for low profile and full height PCI slots.

Certification Level FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998

STD, Taiwan BSMI CNS13438, Korea MIC

Ports Two IEEE 1394 6-Pin Connector (Rear)

Internal Connectors One 10-Pin (9 Contacts) Custom Connector

System Requirements Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*,

Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. No driver is required for this device. Native support is provided by the operating system.

*Certain Windows Vista product features require advanced or additional hardware. See

http://microsoft.com/windowsvista/getready/hardwarereqs.mspx and http://www.microsoft.com/windowsvista/getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor. For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements.

Pentium II 266 or above

128-MB RAM 1-GB Hard Drive CD-ROM drive Built-in sound system Available PCI slot

Temperature - Operating

50° to 131° F (10° to 55° C) -22° to 140° F (-30° to 60° C)

Temperature - Storage

20% to 80%

Relative Humidity -

Operating

Operating Systems

Supported

Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP

Home 32*

*Certain Windows Vista product features require advanced or additional hardware. See

http://microsoft.com/windowsvista/getready/hardwarereqs.mspx and http://www.microsoft.com/windowsvista/getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor. For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements.



Technical Specifications - Networking and Communications

Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC

Connector **RJ-45**

Controller Broadcom 5761 PCI-Express LAN Controller

Memory 8 MB NVRAM serial Flash **Data Rates Supported** 10/100/1000 Mbps

Compliance IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, and 802.3x

Bus Architecture PCI-Express

Data Path Width Single Channel PCI-Express

Data Transfer Mode Bus Master DMA

Hardware Certifications FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for

Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed

(E212044), European Union Notice (CE 0682)

Power Requirement 1.8W @ 3.3V

Boot ROM Support Yes

Network Transfer Mode Full-duplex

Half-duplex (not available for the 1000BASE-T transceiver)

Network Transfer Rate 10BASE-T (half-duplex) 10 Mbps

10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps

Operating Temperature 32° to 131°F (0° to 55° C)

Operating Humidity

131° F (55° C) with 5% to 95% non-condensing humidity 7 cm x 10.5 cm (2.75 in x 4.13 in), low profile compatible **Dimensions**

Operating System Driver

Support

Windows 7 Professional 32-bit and 64-bit, Windows Vista 32-bit SP1, Windows Vista x64 SP1, Windows XP 32 bit professional, Windows XP x64

Red Hat Enterprise Linux (RHEL) WS4**, 5, 6 Desktop/Workstation

Novell SLED 10 & 11

*RHEL WS4 not supported on Z200/Z200SFF

Management Capabilities ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility,

ASF2.0, DASH 1.0 and DASH 1.1 profiles

Kit Contents Broadcom NetXtreme Gigabit Ethernet Plus NIC, Broadcom NetXtreme

Gigabit Ethernet Plus NIC USB Cable Assembly, CD, drivers, quick install

guide, product warranty statement

Technical Specifications - Networking and Communications

Intel Gigabit CT Desktop Connector

NIC

Connector RJ-45

Controller Intel WG82574L Gigabit Ethernet Controller

Memory Integrated Dual 48K configurable transmit receive FIFO Buffers

Data Rates Supported 10/100/1000 Mbps

Compliance IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant,

802.3x flow control

Bus Architecture PCI-E 1.0a

Data Path Width X1, 250 MB/s, Bi-directional interface

Data Transfer Mode Bus-master DMA

Hardware Certifications FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark

for European Union

Power Requirement Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T

Boot ROM Support Yes

Network Transfer Rate 10BASE-T (half-duplex) 10 Mbps

10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps

Operating Temperature 32° to 131°F (0° to 55° C)
Operating Humidity 85% at 131° F (55° C)

Dimensions (H x W x D) 12.1 x 5.7 x 2.0 cm (4.75 x 2.25 x 0.8 in)

Operating System Driver

Support

Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP x64.

Red Hat Enterprise Linux 4 (RHEL4.8 or newer)*, Red Hat Enterprise Linux 5

(RHEL5.3 or newer), Red Hat Enterprise Linux 6
* RHEL WS4 not supported on Z200/Z200SFF

Management Capabilities WOL, PXE, DMI, WFM 2.0

Kit Contents Intel Gigabit CT Desktop NIC, low profile bracket, CD containing Intel

PROset II NIC drivers, quick install guide, product warranty statement

© 2011 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Windows 7 and Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

